

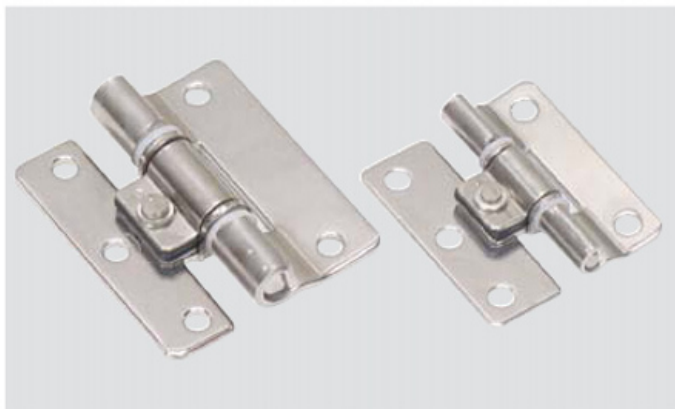
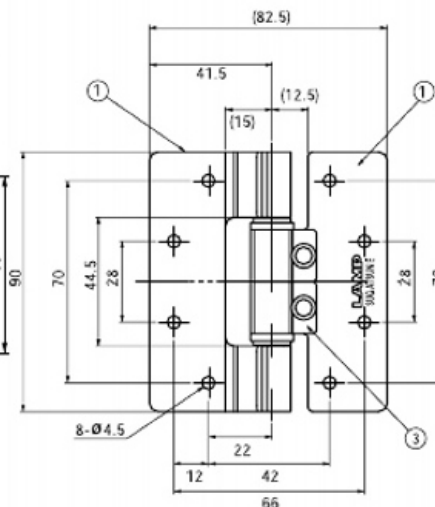


STAINLESS STEEL TORQUE HINGE SFTH

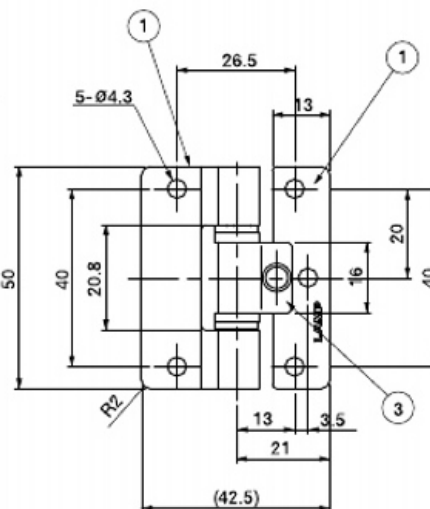

- Hinge with friction torque holds lid/door in desired position.
- Stainless steel material ideal for corrosive environments.
- Operating temperature: -20°C~60°C.

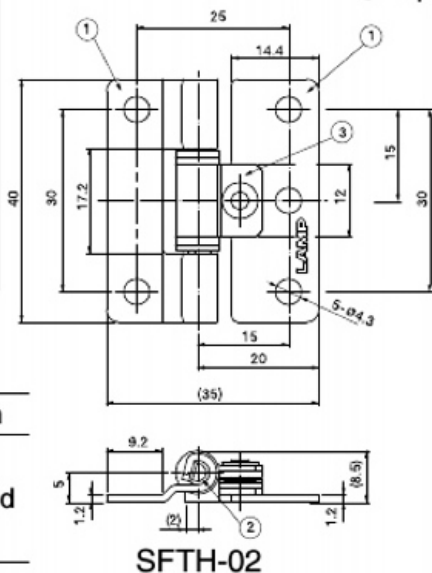

No.	Part Name	Material	Finish
①	Body A	Stainless Steel (SUS304)	Polished
②	Shaft	Stainless Steel (SUS303)	
③	Body B	Stainless Steel (SUS301)	

RoHS	CAD	Item Code	Item Name	Torque per piece	Weight (g)	Box (pcs)	Carton (pcs)
		170-098-199	SFTH-02-5	5±1kgf·cm	21	50	500
		170-098-198	SFTH-03-9	9±2kgf·cm	51	30	300
		170-098-197	SFTH-03-19	19±2kgf·cm			
		170-098-196	SFTH-05-35	35±5kgf·cm	195	10	100
		170-098-200	SFTH-05-58	58±5kgf·cm			