

TORQUE HINGE HG-TWP Exterior Type

Under Development **SUS**



- Ideal for exterior application.
- O-rings at the shaft part prevent invasion of water and dust.

[Specifications]



- Operating temperature: 0°C ~40°C

[Remarks]

- Be sure to read the "Cautions"
- Use all mounting holes.
- When installing, ensure that both hinge shafts are levelled and aligned.

※ The shape of body is different from actual item. Refer to the drawings for details.

[Application Example]

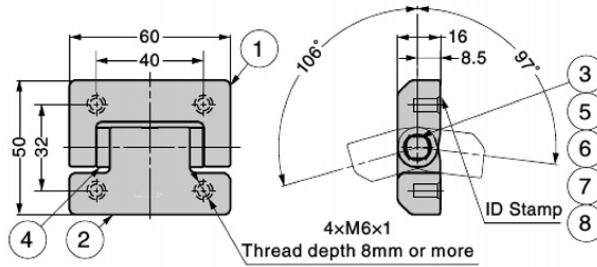

No.	Part Name	Material
①	Bracket	Stainless Steel (SUS316)
②	Base	
③	Shaft	
④	Plug	POM
⑤	O-ring (Outside)	Rubber
⑥	O-ring (Inside)	
⑦	Spring Pin	Stainless Steel
⑧	Hexagon Socket Set Screw	(SUS304)

RoHS	CAD	Item Code	Item Name	ID Stamp	Torque N·m/pc	Torque kgf·cm/pc	Weight (g)	Box (pcs)	Carton (pcs)
-	-	170-037-310	HG-TWP15	15	1.5	15.3	-	-	-
-	-	170-037-311	HG-TWP30	30	3.0	30.6	-	-	-

Refer to : P.15