


3/4 EXTENSION SLIDE SNS27S

LOAD CAPACITY 176~255 N/pair

L=R **SUS**

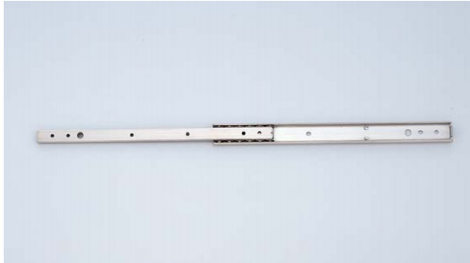


● 3/4 extension (2 members).

[Remarks]

● Be sure to read the "Cautions" **1**.

[Recommended Screws]

● M4 pan head screw or nominal 4 pan head tapping screw

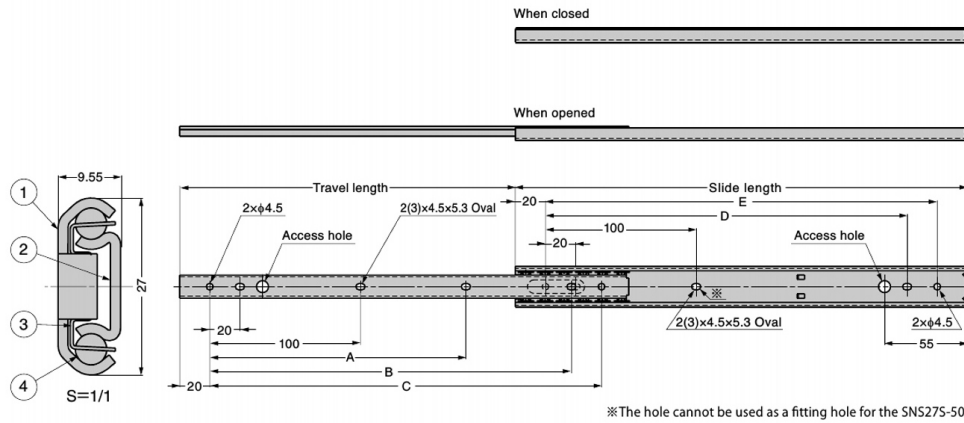

No.	Part Name	Material	Finish
①	Outer Member	Stainless Steel (SUS304)	Plain
②	Inner Member		
③	Retainer		
④	Balls	Stainless Steel (SUS440)	-

Sold by piece.

Ref/MS	CAD	Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	E	Load Capacity N/pair	Load Capacity kgf/pair	Weight (kg/pc)	Box (pcs)	Carton (pcs)
CF	3D	190-110-177	SNS27S-20	200	135	-	140	160	140	160	255	26	0.17	40	-
CF	3D	190-110-178	SNS27S-25	250	185	150	190	210	190	210	235	24	0.21	40	-
CF	3D	190-110-179	SNS27S-30	300	222	190	240	260	240	260			0.25	40	-
CF	3D	190-110-180	SNS27S-35	350	260	225	290	310	290	310	225	23	0.29	40	-
CF	3D	190-110-181	SNS27S-40	400	297	265	340	360	340	360	206	21	0.33	40	-
CF	3D	190-110-182	SNS27S-45	450	334	300	390	410	390	410	196	20	0.37	40	-
CF	3D	190-110-183	SNS27S-50	500	371	337	440	460	440	460	176	18	0.41	40	-

Refer to **1** : P.399