

FULL EXTENSION SLIDE ESR-3813

LOAD CAPACITY 29-45kgf

DETACH


HOLD CLOSED

L=R


SUS



- Full extension.
 - Front disconnect.
 - Positive stop.
 - Hold-in detent.
 - Non-handed.
- * Mount with M4 or #8 Binding, Pan, or Truss head screws.

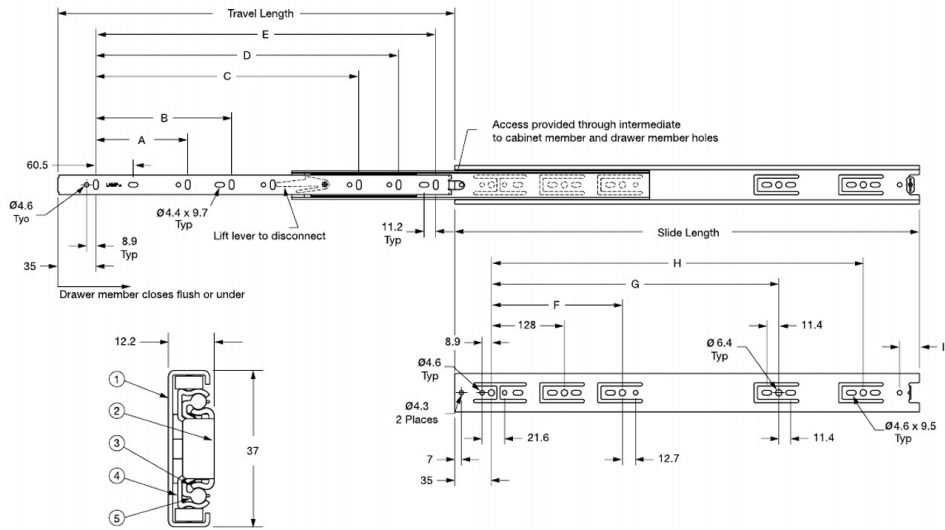

[Installation]

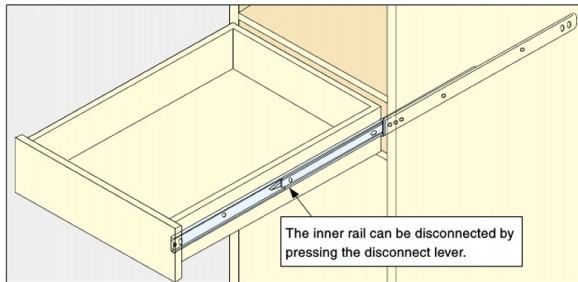

No.	Part Name	Material
①	Outer Rail	Stainless Steel (304)
②	Inner Rail	
③	Retainer	
④	Intermediate Member	
⑤	Balls	

Sold in pairs.

RoHS	CAD	Item Code	Item Name	Slide Length	Travel Length	A	B	C	D	E	F	G	H	I	Load Rating (kgf/pair)	Weight (kg/pair)	Box (pairs)	Carton (pairs)
-	SD	190-118-877	ESR-3813-8	200	200	-	-	-	-	142	-	-	-	-	45	0.40	10	-
-	SD	190-118-878	ESR-3813-10	250	243	-	-	-	-	192	-	-	-	-	42	0.53	10	-
-	SD	190-118-879	ESR-3813-12	300	305	-	-	-	-	242	-	-	-	-	42	0.63	10	-
-	SD	190-118-880	ESR-3813-14	350	355	-	-	-	-	292	-	-	-	-	38	0.72	10	-
-	SD	190-118-881	ESR-3813-16	400	406	-	-	-	-	342	-	-	-	-	36	0.81	10	-
-	SD	190-118-882	ESR-3813-18	450	457	128	-	-	-	392	224	-	-	19.1	34	0.91	10	-
-	SD	190-118-883	ESR-3813-20	500	508	-	-	320	-	442	-	-	-	-	33	1	10	-
-	SD	190-118-884	ESR-3813-22	550	559	-	-	-	416	492	-	-	-	-	31	1.09	10	-
-	SD	190-118-885	ESR-3813-24	600	610	-	224	416	-	542	-	352	448	480	29	1.18	10	-